

D-SUB Machine Pin Right Angle Type




Specifications

Current Rate:3 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:20mΩ Max.
 Dielectric Voltage:500V AC for one minute
 Operation Temperature:-55°C to +105°C

Material

Insulator:Polyester,UL 94V-0
 ◎Standard:PBT
 Terminal:Copper Alloy.

No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim F
9	30.81	24.99	16.33	11.08	19.20	2.54
15	39.14	33.32	24.66	19.39	27.70	
25	53.04	47.04	38.38	33.24	41.10	2.84
37	69.32	63.50	54.84	49.86	57.30	

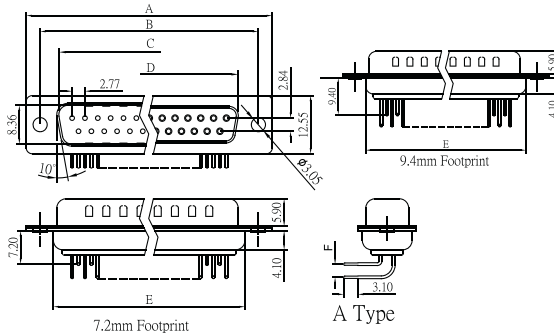

Order Information

