

D-SUB Press Fit Type

Specifications



Current Rate:3 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:20mΩ Max.
 Dielectric Voltage:500V AC for one minute
 Operation Temperature:-55°C to +105°C

Material


Terminal:Copper Alloy.
 ©Insulator: PBT UL 94V-0 Rated.

Dimensions

| No. of Contacts | Dim. A | Dim. B | Dim. C | Dim. D | Dim. E |
|-----------------|--------|--------|--------|--------|--------|
| 9 | 30.81 | 24.99 | 16.92 | 16.33 | 11.08 |
| 15 | 39.14 | 33.32 | 25.50 | 24.66 | 19.39 |
| 25 | 53.04 | 47.04 | 38.96 | 38.38 | 33.24 |
| 37 | 69.32 | 63.50 | 55.42 | 54.84 | 49.86 |

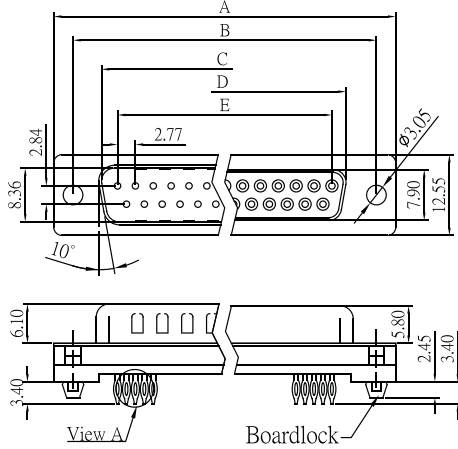

View A=5:1

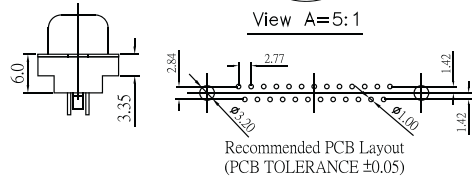

D-SUB Straight Dip Type

Specifications




Current Rate:3 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:20mΩ Max.
 Dielectric Voltage:500V AC for one minute
 Operation Temperature:-55°C to +105°C

Material

Terminal:Copper Alloy.
 ©Insulator: PBT UL 94V-0 Rated.

Dimensions

| No. of Contacts | Dim. A | Dim. B | Dim. C | Dim. D | Dim. E |
|-----------------|--------|--------|--------|--------|--------|
| 9 | 30.81 | 24.99 | 16.92 | 16.33 | 11.08 |
| 15 | 39.20 | 33.32 | 25.25 | 24.70 | 19.39 |
| 25 | 53.05 | 47.04 | 38.96 | 38.40 | 33.24 |
| 37 | 69.40 | 63.50 | 55.42 | 54.80 | 49.86 |

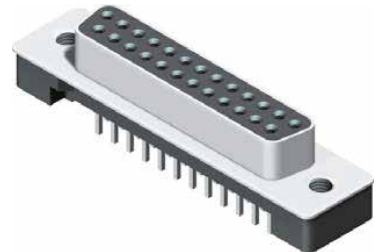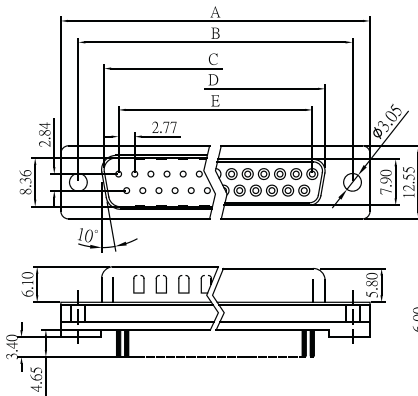

ORDER INFORMATION

