


# D-SUB Slim SMT Right Angle Type

## Specifications


Current Rate:3 AMP  
 Insulation Resistance:1000MΩ Min.  
 Contact Resistance:20mΩ Max.  
 Dielectric Voltage:500V AC for one minute  
 Operation Temperature:-55°C to +105°C

## Material

Insulator:Polyester,UL 94V-0  
 ◎Standard:Nylon 6T  
 Terminal:Copper Alloy

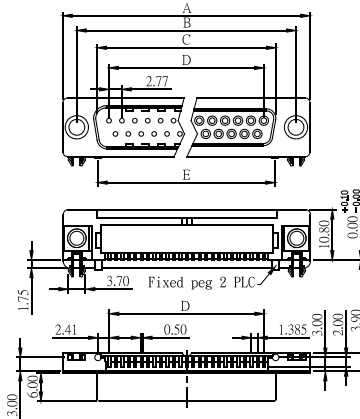

No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E
9	30.81	24.99	16.92	11.08	15.90
25	53.04	47.04	38.96	33.24	38.06

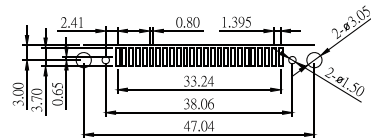

Pin Number :  
 1 14 2 15 3 16 4 17 5 18 6 19 7 20 8 21 9 22 10 23 11 24 12 25 13

Recommended 25PIN PCB Layout

## Order Information

