

D-SUB Right Angle Type

Specifications



Current Rate:3 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:20mΩ Max.
 Dielectric Voltage:500V AC for one minute
 Operation Temperature:-55°C to +105°C

Material

Insulator:Polyester,UL 94V-0
 ©Standard:PBT
 Terminal:Copper Alloy.



| No. of Contacts | Dim. A | Dim. B | Dim. C | Dim. D | Dim. E | Dim. H |
|-----------------|--------|--------|--------|--------|--------|--------|
| 9 | 30.81 | 24.99 | 16.92 | 16.33 | 11.08 | 18.40 |
| 15 | 38.14 | 33.32 | 25.30 | 24.66 | 19.39 | 20.70 |
| 25 | 53.04 | 47.04 | 38.96 | 38.38 | 33.24 | 25.30 |
| 37 | 69.32 | 63.50 | 55.42 | 54.84 | 49.86 | |

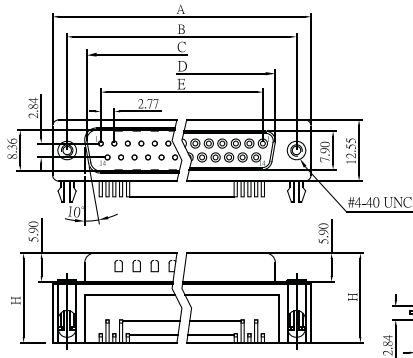

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

Order Information

