










# DVI Female Right Angle 24Pin

## Specifications

Current Rate:1 AMP  
 Insulation Resistance:1000MΩ Min.  
 Contact Resistance:30mΩ Max.  
 Dielectric Voltage:250V AC for one minute  
 Operation Temperature:-55°C to +85°C

## Material

Insulator:Polyester,UL 94V-0  
 © Standard:Nylon 66  
 Terminal:Copper Alloy  
 Plated:Selective Plated

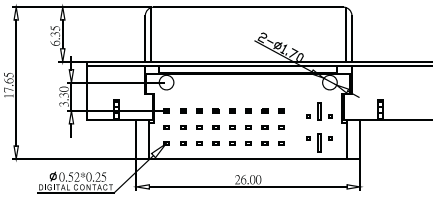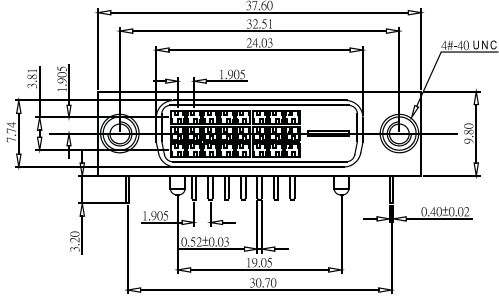










# DVI Female Right Angle 29Pin

## Specifications

Current Rate:1 AMP  
 Insulation Resistance:1000MΩ Min.  
 Contact Resistance:30mΩ Max.  
 Dielectric Voltage:250V AC for one minute  
 Operation Temperature:-55°C to +85°C

## Material

Insulator:Polyester,UL 94V-0  
 © Standard:Nylon 66  
 Terminal:Copper Alloy  
 Plated:Selective Plated

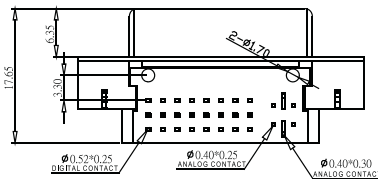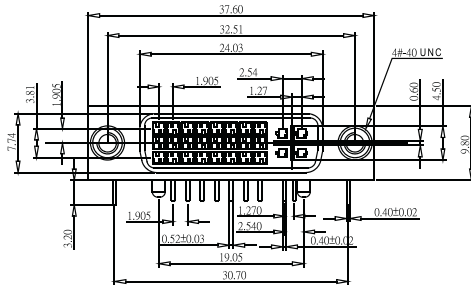

# ORDER INFORMATION

