HDMI Male Solder 19 Pin

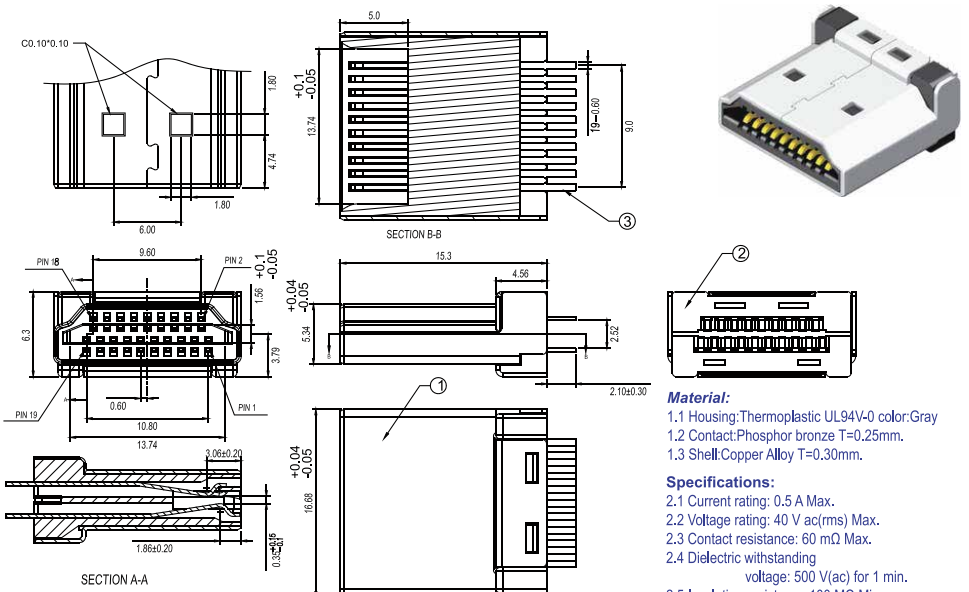

Material:

1.1 Housing:Thermoplastic UL94V-0 color:Gray
1.2 Contact:Phosphor bronze T=0.25mm.
1.3 Shell:Copper Alloy T=0.30mm.

Specifications:

2.1 Current rating: 0.5 A Max.
2.2 Voltage rating: 40 V ac(rms) Max.
2.3 Contact resistance: 60 mΩ Max.
2.4 Dielectric withstanding
voltage: 500 V(ac) for 1 min.
2.5 Insulation resistance:100 MΩ Min.
2.6 Operation temperature range:-20°C~85°C

Part No.:HDMI-M19 SB Y N 3-U

Selective 15u"

Nickel Shell