


USB 3.0 Female Dip 90° B Type

1. ELECTRIC:





- a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN
- c. DIELECTRIC VOLTAGE: 1.8A AT 250V AC MIN
- d. OPERATING TEMPERATURE: -55°C- 85°C

2. INSERTION FORCE: 35N Max EXTRACTION FORCE: 10N MIN INITIAL AND 8N MIN AFTER THE SPECIFIED

4	HOUSING	PBT	UL94V-0
3	SHELL	SPCC or Brass	OVEP-PLATING: Ni Or Au
2	5P TERMINAL	Brass T=0.2mm	OVEP-PLATING: Au Ni/Sh
1	4P TERMINAL	Phosphor Bronze T=0.2mm	OVEP-PLATING: Au Ni/Sh
ITEM	DESCRIPTION	MATERIAL	REMARKS

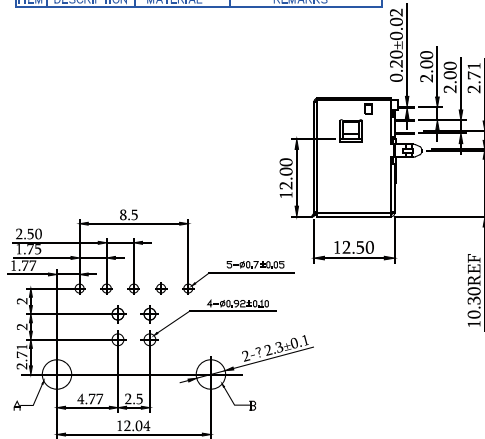

RECOMMENDED PCB LAYOUT (COMPONENT SIDE)
PCB LAYOUT TOLERANCE: ±0.25 (PCB T=1.6mm)



Part No. USB 001 BU 3.0 L