




# Board To Board Male 0.635mm H=4.0mm

## Specifications

Current Rate:0.5 AMP  
 Insulation Resistance:1000MΩ Min.  
 Contact Resistance:40mΩ Max.  
 Dielectric Voltage:100V AC for one minute  
 Operation Temperature:-25°C to +85°C

## Material

Insulator:Polyester,UL 94V-0  
 ©Standard:LCP  
 Terminal:Copper Alloy  
 Plating:Gold Plated

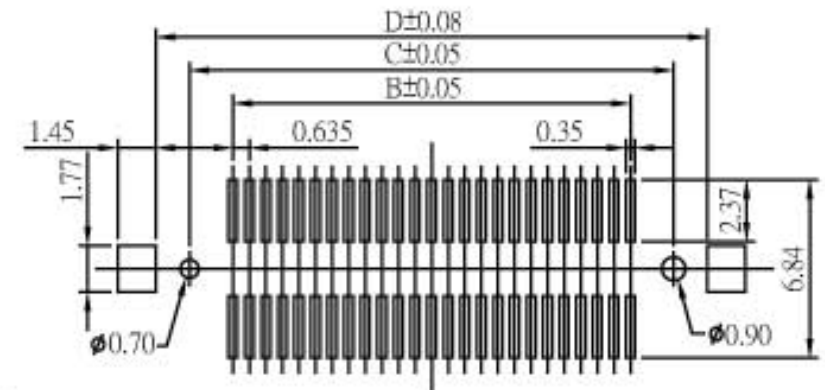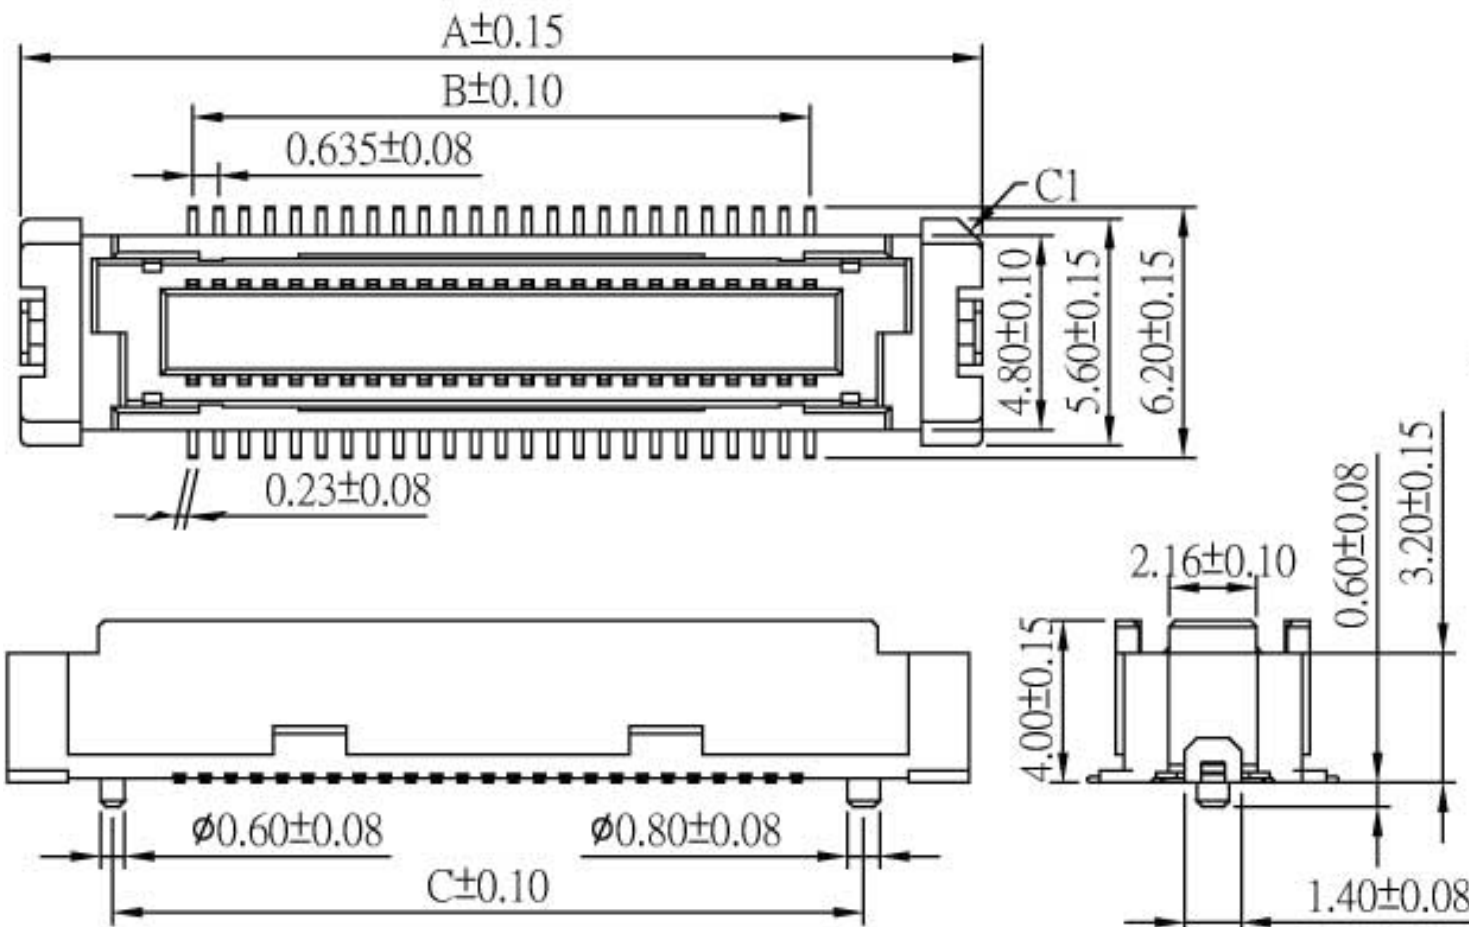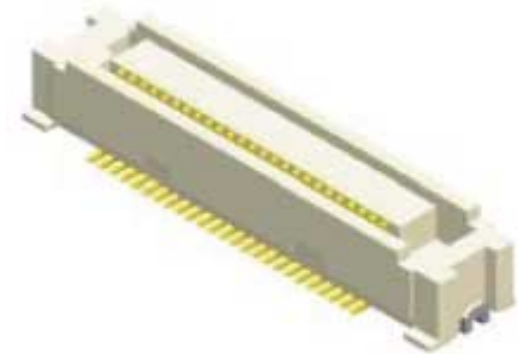

No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D
20	14.21	5.70	9.01	11.61
30	17.39	8.88	12.19	14.79
40	20.57	12.06	15.37	17.97
50	23.75	15.24	18.55	21.15