


Board To Board Male 0.8mm Right Angle Type

Specifications

Current Rate: 0.5 AMP
 Insulation Resistance: 1000M Ω Min.
 Contact Resistance: 20m Ω Max.
 Dielectric Voltage: 200V AC for one minute
 Operation Temperature: -20°C to +105°C

Material

Insulator: Polyester, UL 94V-0
 ©Standard: Nylon 6T
 Terminal: Copper Alloy
 Plating: Tin Plated

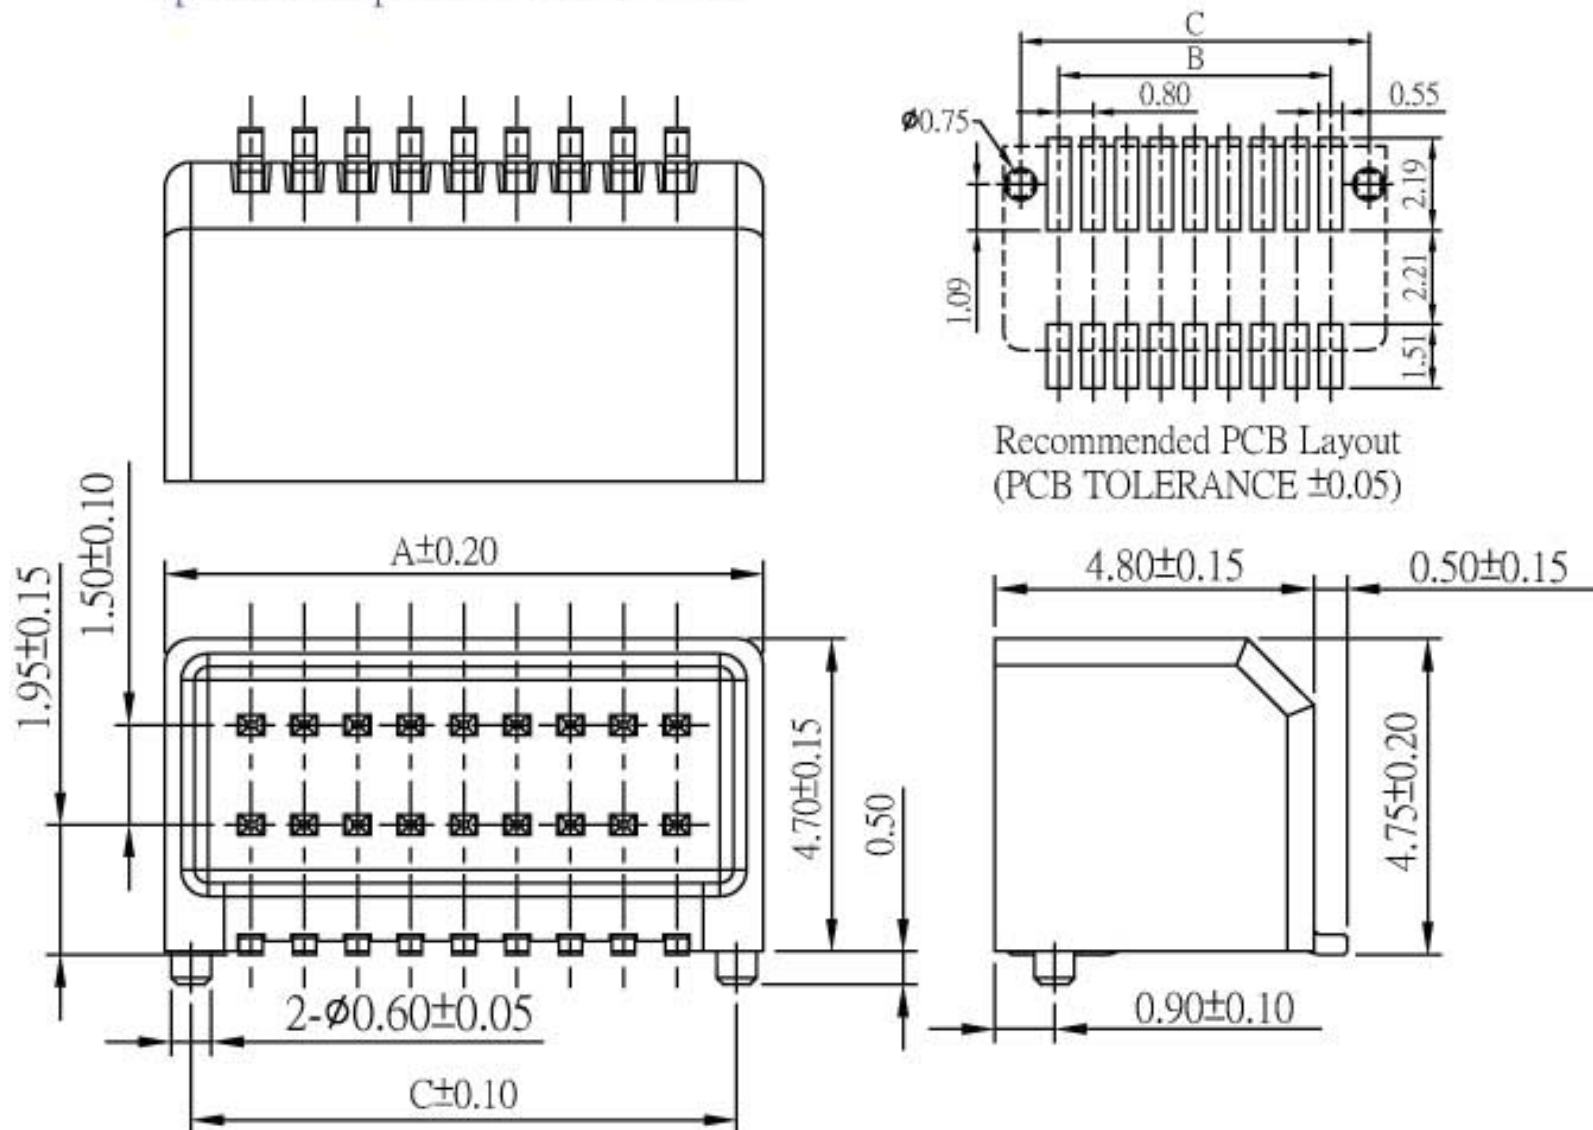

No. of Contacts	Dim. A	Dim. B	Dim. C
6	4.20	1.60	3.40
8	5.00	2.40	4.20
10	5.80	3.20	5.00
12	6.60	4.00	5.80
14	7.40	4.80	6.60
16	8.20	5.60	7.40
18	9.00	6.40	8.20
20	9.80	7.20	9.00
22	10.60	8.00	9.80
24	11.40	8.80	10.60
26	12.20	9.60	11.40
28	13.00	10.40	12.20
30	13.80	11.20	13.00
32	14.60	12.00	13.80
34	15.40	12.80	14.60
36	16.20	13.60	15.40