

Specifications

Current Rating: 0.5A AC,DC

Voltage Rating: 30V AC,DC

Temperature Range: -25°C to +85°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 100MΩ Min





Withstanding Voltage: 200V AC/minute

Terminal: Phosphor Bronze / Tin Plated

Solder Tabs: Phosphor Bronze / Tin Plated

Material: Nylon 6T, UL94V-0

Part No.	Dimensions	
	A	B
0800MR-02TW-U	0.80	3.80
0800MR-04TW-U	2.40	5.40
0800MR-08TW-U	5.60	8.60
0800MR-10TW-U	7.20	10.20
0800MR-12TW-U	8.80	11.80
0800MR-14TW-U	10.40	13.40
0800MR-15TW-U	11.20	14.20
0800MR-16TW-U	12.00	15.00
0800MR-17TW-U	12.80	15.80
0800MR-20TW-U	15.20	18.20

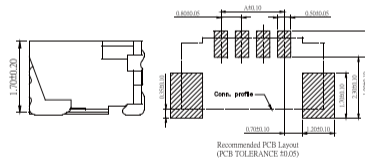

Part No.:0800MR-XXTW-U