






Specifications

Current Rating: 1A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 100MΩ Min
Withstanding Voltage: 500V AC/minute
Terminal: Phosphor Bronze / Tin Plated
Solder Tabs: Brass / Tin Plated
Material: Nylon 6T, UL94V-0

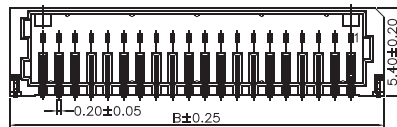

Part No.	Dimensions	
	A	B
1001MR-206GW-U	5.00	9.10
1001MR-208GW-U	7.00	11.10
1001MR-210GW-U	9.00	13.10
1001MR-215GW-U	14.00	18.10
1001MR-220GW-U	19.00	23.10
1001MR-225GW-U	24.00	28.10

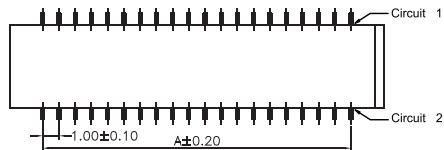

Part No.:1001MR-2XXGW-U