
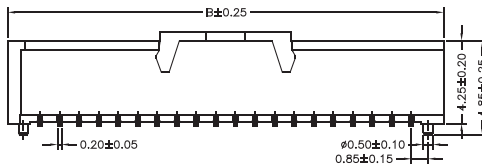
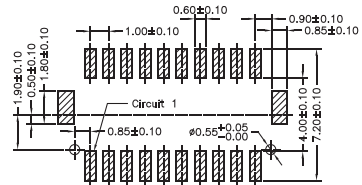
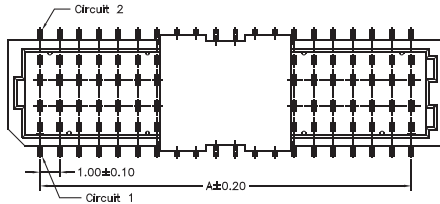



Specifications

Current Rating: 1A AC,DC
 Voltage Rating: 50V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100MΩ Min
 Withstanding Voltage: 500V AC/minute
 Terminal: Phosphor Bronze / Gold Plated
 Solder Tabs: Brass / Gold Plated
 Material: Nylon 6T, UL94V-0

Part No.	Dimensions	
	A	B
1001MS-206GW-U	5.00	8.30
1001MS-208GW-U	7.00	10.30
1001MS-210GW-U	9.00	12.30
1001MS-215GW-U	14.00	17.30
1001MS-220GW-U	19.00	22.30
1001MS-225GW-U	24.00	27.30



PCB LAYOUT

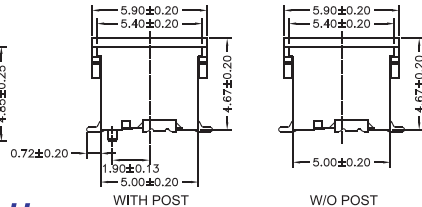

Part No.:1001MS-2XXGW-U

1: WITH POST
 2: W/O POST