

### Specifications

Current Rating: 1A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: -25°C to +85°C

Contact Resistance: 30mΩ Max



Insulation Resistance: 500MΩ Min

Withstanding Voltage: 500V AC/minute

Shell: Phosphor Bronze / Tin Plated

Terminal: Phosphor Bronze / Gold Plated

Material:Nylon 6T,UL94V-0

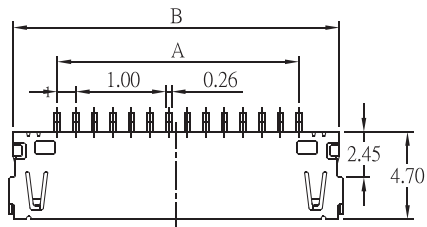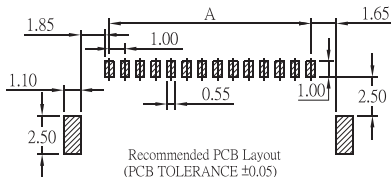

Part No.	Dimensions		
	A	B	C
1003MR-08TW-U	7.00	11.55	11.95
1003MR-14TW-U	13.00	17.55	17.95
1003MR-20TW-U	19.00	23.55	23.95
1003MR-30TW-U	29.00	33.55	33.95

**Part No.:1003MR-XXTW-U**

