
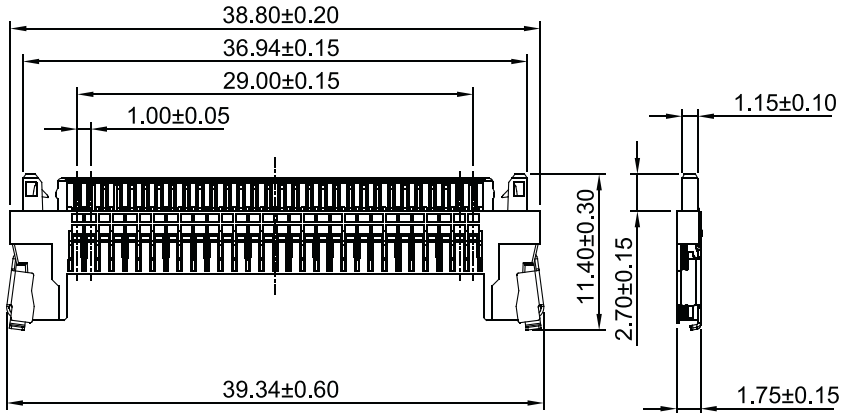


### Specifications

Current Rating: 1A AC,DC  
Voltage Rating: 200V AC,DC  
Temperature Range: -25°C to +85°C  
Contact Resistance: 40mΩ Max  
Insulation Resistance: 100MΩ Min  
Withstanding Voltage: 500V AC/minute  
Material:Nylon 46,UL94V-0  
Shell:Stainless  
Lock lever: Stainless

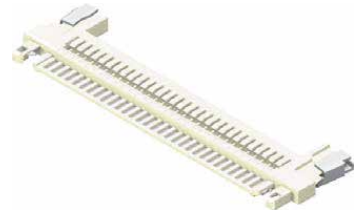

**Part No.:1004H-30W-U**