

Specifications

Current Rating: 1A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -25°C to +85°C

Contact Resistance: 20mΩ Max


Insulation Resistance: 100MΩ Min

Withstanding Voltage: 500V AC/minute



Terminal: Phosphor Bronze / Tin Plated

Solder Tabs: Phosphor Bronze / Tin Plated



Material: Nylon 6T,UL94V-0



Part No.	Dimensions	
	A	B
1250MR-02TW-U	1.25	7.75
1250MR-03TW-U	2.50	9.00
1250MR-04TW-U	3.75	10.25
1250MR-05TW-U	5.00	11.50
1250MR-06TW-U	6.25	12.75
1250MR-07TW-U	7.50	14.00
1250MR-08TW-U	8.75	15.25
1250MR-09TW-U	10.00	16.50
1250MR-10TW-U	11.25	17.75
1250MR-11TW-U	12.50	19.00
1250MR-12TW-U	13.75	20.25
1250MR-13TW-U	15.00	21.50
1250MR-14TW-U	16.25	22.75
1250MR-15TW-U	17.50	24.00
1250MR-16TW-U	18.75	25.25
1250MR-17TW-U	20.00	26.50
1250MR-18TW-U	21.25	27.75

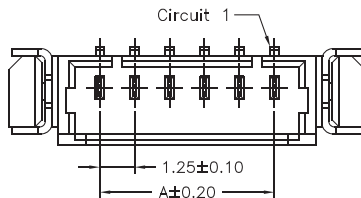

P.C.B LAYOUT

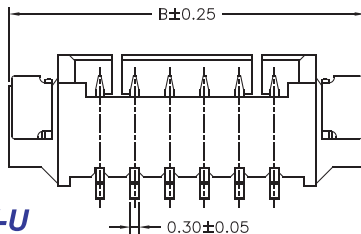

Part No.:1250MR-XXTW-U