
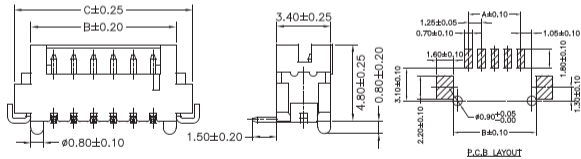



### Specifications

Current Rating: 1A AC,DC  
 Voltage Rating: 150V AC,DC  
 Temperature Range: -25°C to +85°C  
 Contact Resistance: 30mΩ  
 Insulation Resistance: 500M  
 Withstanding Voltage: 500V AC/minute  
 Terminal: Brass / Gold Plated  
 Solder Tabs: Phosphor Bronze / Gold Plated  
 Material: Nylon 6T, UL94V-0

Part No.	Dimensions		
	A	B	C
1252MS-102GW-U	1.25	4.15	6.25
1252MS-103GW-U	2.50	5.40	7.50
1252MS-104GW-U	3.75	6.65	8.75
1252MS-105GW-U	5.00	7.90	10.00
1252MS-106GW-U	6.25	9.15	11.25
1252MS-107GW-U	7.50	10.40	12.50
1252MS-108GW-U	8.75	11.65	13.75
1252MS-109GW-U	10.00	12.90	15.00
1252MS-110GW-U	11.25	14.15	16.25
1252MS-111GW-U	12.50	15.40	17.50
1252MS-112GW-U	13.75	16.65	18.75
1252MS-113GW-U	15.00	17.90	20.00
1252MS-114GW-U	16.25	19.15	21.25
1252MS-115GW-U	17.50	20.40	22.50



**Part No.:1252MS-1XXGW-U**