



Specifications

Current Rating: 1A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 30mΩ Max
Insulation Resistance: 500MΩ
Withstanding Voltage: 500V AC/minute
Pin Material: Brass / Tin Plated
Solder Tabs: Brass / Tin Plated
Material:Nylon 6T,UL94V-0

Part No.	Dimensions	
	A	B
1253MRA-02TB-U	1.25	7.45
1253MRA-03TB-U	2.50	8.70
1253MRA-04TB-U	3.75	9.95
1253MRA-05TB-U	5.00	11.20
1253MRA-06TB-U	6.25	12.45
1253MRA-07TB-U	7.50	13.70
1253MRA-08TB-U	8.75	14.95
1253MRA-09TB-U	10.00	16.20
1253MRA-10TB-U	11.25	17.45
1253MRA-11TB-U	12.50	18.70
1253MRA-12TB-U	13.75	19.95
1253MRA-13TB-U	15.00	21.00
1253MRA-14TB-U	16.25	22.45
1253MRA-15TB-U	17.50	23.70
1253MRA-20TB-U	23.75	29.95
1253MRA-25TB-U	30.00	36.20
1253MRA-30TB-U	36.25	42.45

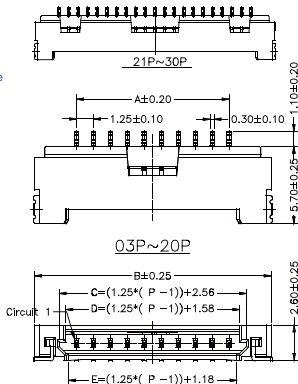

Part No.:1253MRA-XXTB-U