
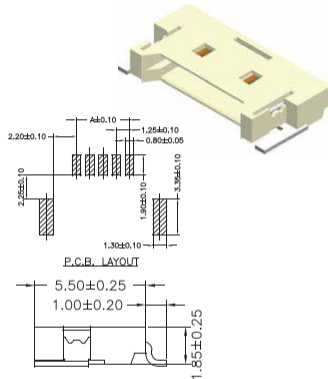


Specifications

Current Rating: 1A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 100MΩ Min
Withstanding Voltage: 500V AC/minute
Terminal: Brass / Gold Plated
Solder Tabs: Brass / Tin Plated
Material: Nylon 6T, UL94V-0

Part No.	Dimensions		
	A	B	C
1254MR-02GW-U	1.25	7.65	7.97
1254MR-03GW-U	2.50	8.90	9.22
1254MR-04GW-U	3.75	10.15	10.47
1254MR-05GW-U	5.00	11.40	11.72
1254MR-06GW-U	6.25	12.65	12.97
1254MR-07GW-U	7.50	13.90	14.22
1254MR-08GW-U	8.75	15.15	15.47
1254MR-09GW-U	10.00	16.40	16.72
1254MR-10GW-U	11.25	17.65	17.97
1254MR-11GW-U	12.50	18.90	19.22
1254MR-12GW-U	13.75	20.15	20.47
1254MR-14GW-U	16.25	22.65	22.97
1254MR-15GW-U	17.50	23.90	24.22
1254MR-16GW-U	18.75	25.15	25.47
1254MR-20GW-U	23.75	30.15	30.47
1254MR-30GW-U	36.25	42.65	42.97

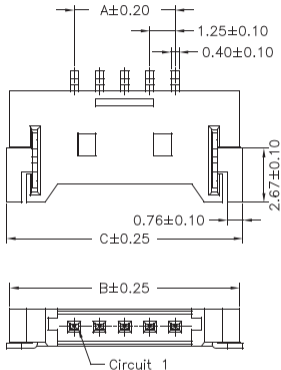

Part No.:1254MR-XXGW-U