

Specifications

Current Rating: 1A AC,DC

Voltage Rating: 200V AC,DC

Temperature Range: -25°C to +85°C


Contact Resistance: 40mΩ Max

Insulation Resistance: 100MΩ Min

Withstanding Voltage: 500V AC/minute

Material:Nylon 66,UL94V-0

Part No.	Dimensions		
	A	B	C
1255H-02B-L	1.25	3.80	6.00
1255H-03B-L	2.50	5.05	7.25
1255H-04B-L	3.75	6.30	8.50
1255H-05B-L	5.00	7.55	9.75
1255H-06B-L	6.25	8.80	11.00
1255H-08B-L	8.75	11.30	13.50
1255H-10B-L	11.25	13.80	16.00
1255H-15B-L	17.50	20.05	22.25
1255H-20B-L	23.75	26.30	28.50
1255H-25B-L	30.00	32.55	34.75
1255H-30B-L	36.25	38.80	41.00

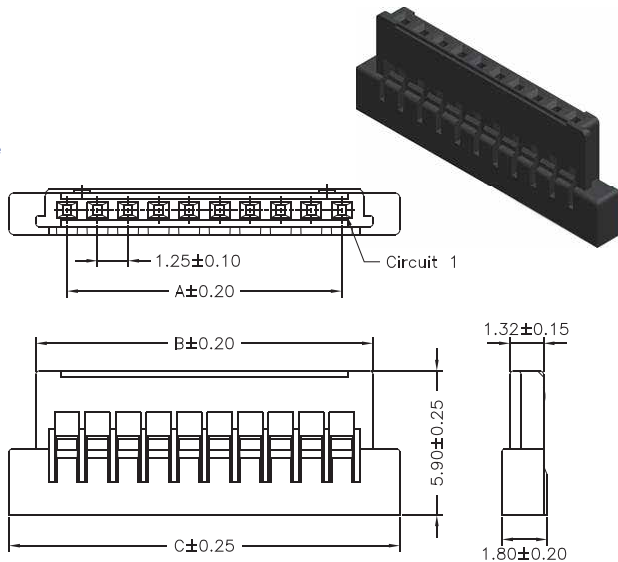

Part No.:1255H-XXB-L