


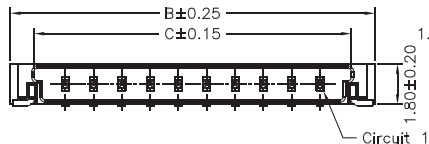


Specifications

Current Rating: 1A AC,DC
Voltage Rating: 200V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 40mΩ Max
Insulation Resistance: 100MΩ Min
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze / Gold Plated
Solder: Phosphor Bronze / Gold Plated
Material:Nylon 6T,UL94V-0



Part No.	Dimensions		
	A	B	C
1255MR-02GW-U	1.25	6.10	4.01
1255MR-03GW-U	2.50	7.35	5.26
1255MR-04GW-U	3.75	8.60	6.51
1255MR-05GW-U	5.00	9.85	7.76
1255MR-06GW-U	6.25	11.10	9.01
1255MR-08GW-U	8.75	13.60	11.51
1255MR-10GW-U	11.25	16.10	12.01
1255MR-15GW-U	17.50	22.35	20.26
1255MR-20GW-U	23.75	28.60	26.51
1255MR-25GW-U	30.00	34.85	32.76
1255MR-30GW-U	36.25	41.10	39.01

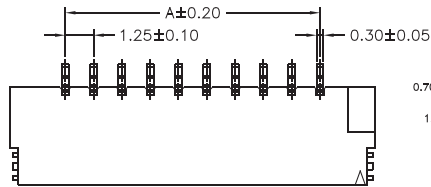

Part No.:1255MR-XXGW-U