

### Specifications

Current Rating: 1A AC,DC

Voltage Rating: 200V AC,DC

Temperature Range: -25°C to +85°C

Contact Resistance: 40mΩ Max



Insulation Resistance: 100MΩ Min

Withstanding Voltage: 500V AC/minute


Terminal: Brass / Tin Plated

Shell: Brass / Tin Plated

Material: LCP, UL94V-0

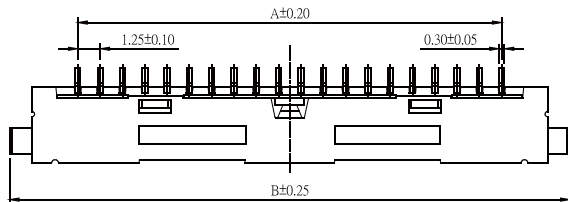

PCB LAYOUT



Part No.	Dimensions		
	A	B	C
1255MRA-20TW-U	23.75	31.40	26.60
1255MRA-30TW-U	36.25	43.90	39.10

**Part No.:1255MRA-XXTW-U**