

Specifications

Current Rating: 1.2A AC,DC

Voltage Rating: 32V AC,DC

Temperature Range: -40°C to +105°C


Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.


Withstanding Voltage: 500V AC/minute

Pin Material: Tin Plated

Material: PBT, UL94V-0



Part No.	Dimensions	
	A	B
1271IDC-04TW-L	7.59	3.81
1271IDC-06TW-L	10.13	6.35
1271IDC-08TW-L	12.67	8.89
1271IDC-10TW-L	15.21	11.43
1271IDC-12TW-L	17.75	13.97
1271IDC-14TW-L	20.29	16.51
1271IDC-16TW-L	22.83	19.05
1271IDC-18TW-L	25.37	21.59
1271IDC-20TW-L	27.91	24.13
1271IDC-22TW-L	30.45	26.67
1271IDC-24TW-L	32.99	29.21
1271IDC-26TW-L	35.53	31.75

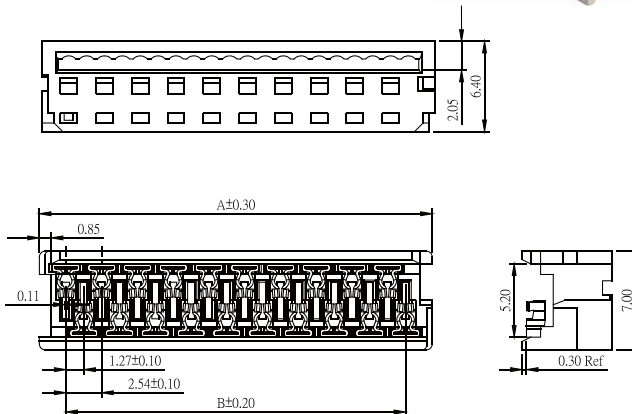

Part No.:1271IDC-XXTW-L