

Specifications

Current Rating: 1A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: -25°C to +85°C

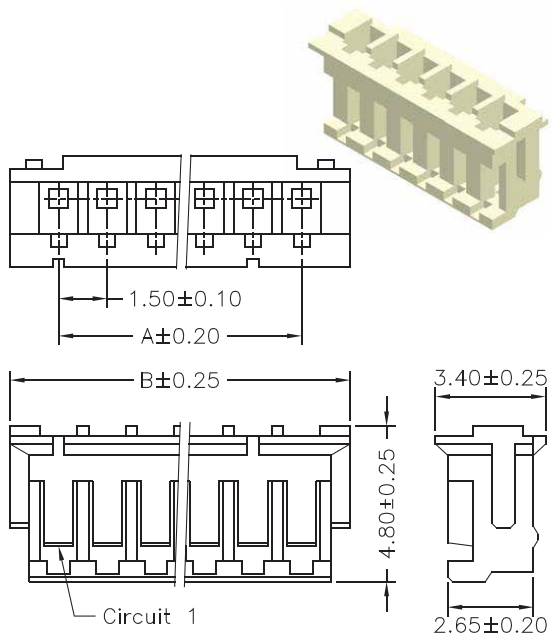
Contact Resistance: 20mΩ Max

Insulation Resistance: 500MΩ Min

Withstanding Voltage: 500V AC/minute

Material:Nylon 66,UL94V-0

Part No.	Dimensions	
	A	B
1500H-02W-L	1.50	4.50
1500H-03W-L	3.00	6.00
1500H-04W-L	4.50	7.50
1500H-05W-L	6.00	9.00
1500H-06W-L	7.50	10.50
1500H-07W-L	9.00	12.00
1500H-08W-L	10.50	13.50
1500H-09W-L	12.00	15.00
1500H-10W-L	13.50	16.50
1500H-11W-L	15.00	18.00
1500H-12W-L	16.50	19.50
1500H-13W-L	18.00	21.00

**Part No.:1500H-XXW-L**