

Specifications

Current Rating: 3A AC,DC

Voltage Rating: 350V AC,DC

Temperature Range: -25°C to +85°C


Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min


Withstanding Voltage: 500V AC/minute

Terminal: Brass / Tin Plated

Material: Nylon 6T,UL94V-0



Part No.	Dimensions	
	A	B
1501MS-02TW-U	1.50	4.30
1501MS-03TW-U	3.00	5.80
1501MS-04TW-U	4.50	7.30
1501MS-05TW-U	6.00	8.80
1501MS-06TW-U	7.50	10.30
1501MS-07TW-U	9.00	11.80
1501MS-08TW-U	10.50	13.30
1501MS-09TW-U	12.00	14.80
1501MS-10TW-U	13.50	16.30
1501MS-11TW-U	15.00	17.80
1501MS-12TW-U	16.50	19.30
1501MS-13TW-U	18.00	20.80
1501MS-14TW-U	19.50	22.30
1501MS-15TW-U	21.00	23.80

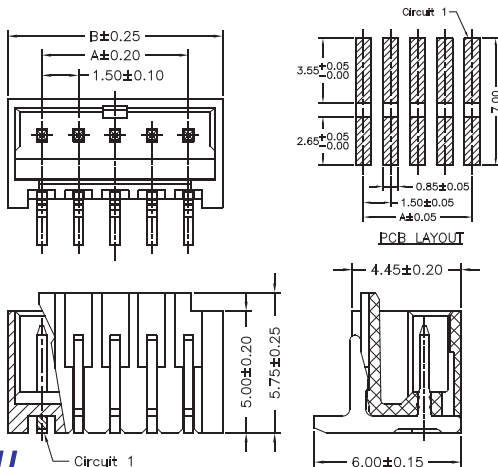

Part No.:1501MS-XXTW-U