

### Specifications

Current Rating: 2A AC,DC

Voltage Rating: 125V AC,DC


Temperature Range: -25°C to +85°C

Contact Resistance: 20mΩ Max




Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 800V AC/minute

Material:Nylon 66,UL94V-0



Part No.	Dimensions	
	A	B
2002H-02W-L	2.00	4.90
2002H-03W-L	4.00	6.90
2002H-04W-L	6.00	8.90
2002H-05W-L	8.00	10.90
2002H-06W-L	10.00	12.90
2002H-07W-L	12.00	14.90
2002H-08W-L	14.00	16.90
2002H-09W-L	16.00	18.90
2002H-10W-L	18.00	20.90
2002H-11W-L	20.00	22.90
2002H-12W-L	22.00	24.90
2002H-13W-L	24.00	26.90
2002H-14W-L	26.00	28.90
2002H-15W-L	28.00	30.90

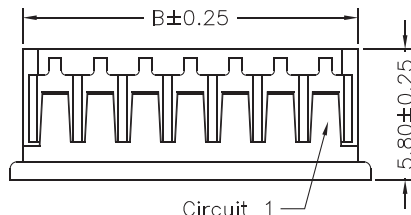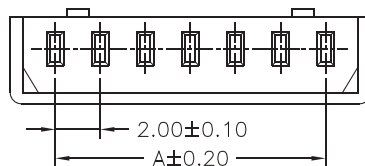

**Part No ·2002H-XXW-L**