

Specifications

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C to +85°C

Contact Resistance: 30mΩ Max




Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 650V AC/minute

Material:Nylon 66,UL94V-0



Part No.	Dimensions	
	A	B
2003H-02B-L	2.00	6.00
2003H-03B-L	4.00	8.00
2003H-04B-L	6.00	10.00
2003H-05B-L	8.00	12.00
2003H-06B-L	10.00	14.00
2003H-07B-L	12.00	16.00
2003H-08B-L	14.00	18.00
2003H-09B-L	16.00	20.00
2003H-10B-L	18.00	22.00
2003H-11B-L	20.00	24.00
2003H-12B-L	22.00	26.00
2003H-13B-L	24.00	28.00
2003H-14B-L	26.00	30.00
2003H-15B-L	28.00	32.00

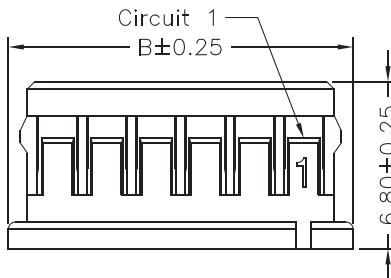

Part No.:2003H-XXB-L