

### Specifications

Current Rating: 4A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -25°C to +85°C


Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Material:Nylon 66,UL94V-0

Part No.	Dimensions		
	A	B	C
2006H-02W-L	2.00	4.80	6.00
2006H-03W-L	4.00	6.80	8.00
2006H-04W-L	6.00	8.80	10.00
2006H-05W-L	8.00	10.80	12.00
2006H-06W-L	10.00	12.80	14.00
2006H-07W-L	12.00	14.80	16.00
2006H-08W-L	14.00	16.80	18.00
2006H-09W-L	16.00	18.80	20.00
2006H-10W-L	18.00	20.80	22.00
2006H-11W-L	20.00	22.80	24.00
2006H-12W-L	22.00	24.80	26.00
2006H-13W-L	24.00	26.80	28.00
2006H-14W-L	26.00	28.80	30.00
2006H-15W-L	28.00	30.80	32.00

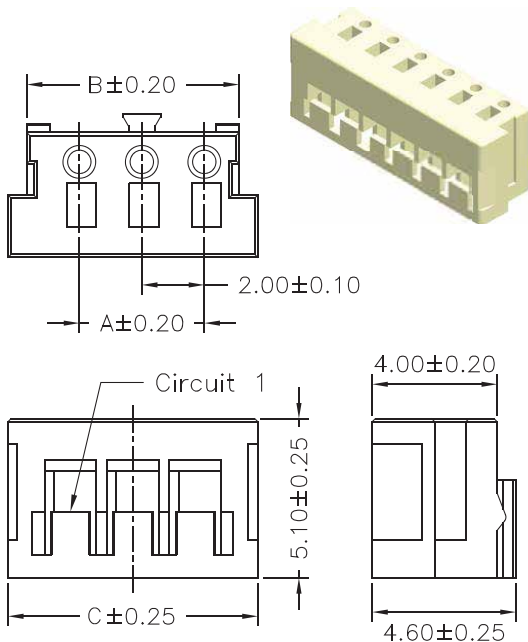

**Part No ·2006H-XXW-L**