





### Specifications

Current Rating: 3A AC,DC  
 Voltage Rating: 300V AC,DC  
 Temperature Range: -25°C to +85°C  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 100M Ω Min  
 Withstanding Voltage: 1000V AC/minute  
 Terminal: Brass / Tin Plated  
 Material: Nylon 66, UL94V-0

Part No.	Dimensions	
	A	B
2007S-02TR-L	2.00	6.00
2007S-03TR-L	4.00	8.00
2007S-04TR-L	6.00	10.00
2007S-05TR-L	8.00	12.00
2007S-06TR-L	10.00	14.00
2007S-07TR-L	12.00	16.00
2007S-08TR-L	14.00	18.00
2007S-09TR-L	16.00	20.00
2007S-10TR-L	18.00	22.00
2007S-11TR-L	20.00	24.00
2007S-12TR-L	22.00	26.00
2007S-13TR-L	24.00	28.00
2007S-14TR-L	26.00	30.00
2007S-15TR-L	28.00	32.00



Recommended PCB Layout  
 (PCB TOLERANCE ±0.05)

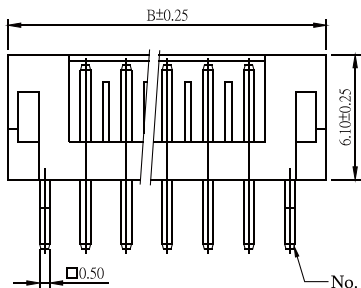

**Part No.:2007S-XXTR-L**