





Specifications

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 30mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Material: Nylon 66,UL94V-0

Part No.	Dimensions	
	A	B
2008H-02W-L	2.00	4.60
2008H-03W-L	4.00	6.60
2008H-04W-L	6.00	8.60
2008H-05W-L	8.00	10.60
2008H-06W-L	10.00	12.60
2008H-07W-L	12.00	14.60
2008H-08W-L	14.00	16.60
2008H-09W-L	16.00	18.60
2008H-10W-L	18.00	20.60
2008H-11W-L	20.00	22.60
2008H-12W-L	22.00	24.60
2008H-13W-L	24.00	26.60
2008H-14W-L	26.00	28.60
2008H-15W-L	28.00	30.60
2008H-16W-L	30.00	32.60

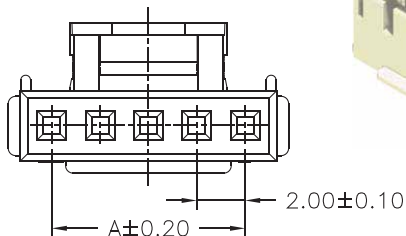

Part No.:2008H-XXW-L