
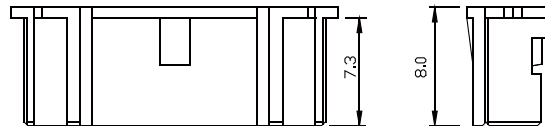
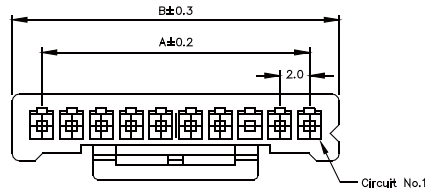
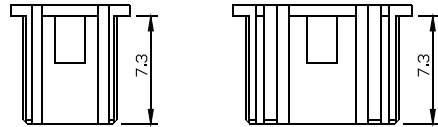


P
 Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 800V AC/minute
 Material:Nylon 66,UL94V-0

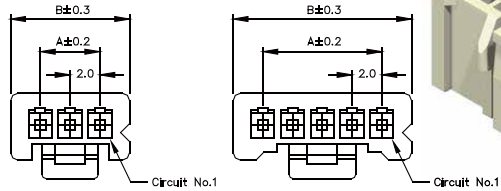

Part No.	Dimensions	
	A	B
2013H-02W-L	2.00	6.00
2013H-03W-L	4.00	8.00
2013H-04W-L	6.00	10.00
2013H-05W-L	8.00	12.00
2013H-06W-L	10.00	14.00
2013H-07W-L	12.00	16.00
2013H-08W-L	14.00	18.00
2013H-09W-L	16.00	20.00
2013H-10W-L	18.00	22.00
2013H-11W-L	20.00	24.00
2013H-12W-L	22.00	26.00
2013H-13W-L	24.00	28.00
2013H-14W-L	26.00	30.00
2013H-15W-L	28.00	32.00

Part No ·2013H-XXW-L