

### Specifications

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C to +85°C

Contact Resistance: 20mΩ Max





Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Terminal: Brass / Gold Plated

Material: Nylon 6T,UL94V-0

Part No.	Dimensions	
	A	B
2545MR-02GB-U	2.54	8.89
2545MR-03GB-U	5.08	11.43
2545MR-04GB-U	7.62	13.97
2545MR-05GB-U	10.16	16.51
2545MR-06GB-U	12.70	19.05
2545MR-07GB-U	15.24	21.59
2545MR-08GB-U	17.78	24.13
2545MR-09GB-U	20.32	26.67
2545MR-10GB-U	22.86	29.21
2545MR-11GB-U	25.40	31.75
2545MR-12GB-U	27.94	34.29

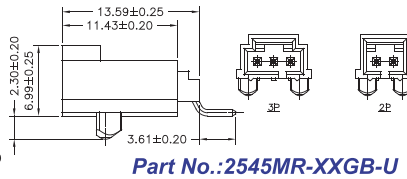

**Part No.:2545MR-XXGB-U**