

Specifications

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C to +85°C

Contact Resistance: 20mΩ Max.




Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1500V AC/minute


Terminal: Brass / Gold Plated

Material: PBT,UL94V-0

Part No.	Dimensions	
	A	B
2545R-02GB-L	2.54	7.59
2545R-03GB-L	5.08	10.13
2545R-04GB-L	7.62	12.67
2545R-05GB-L	10.16	15.21
2545R-06GB-L	12.70	17.75
2545R-07GB-L	15.24	20.29
2545R-08GB-L	17.78	22.83
2545R-09GB-L	20.32	25.37
2545R-10GB-L	22.86	27.91
2545R-11GB-L	25.40	30.45
2545R-12GB-L	27.94	32.99

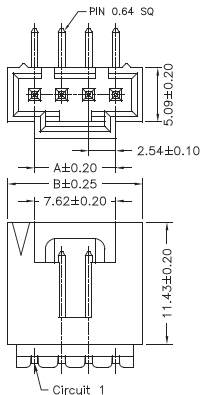

P.C.B. LAYOUT



Part No.:2545R-XXGB-L