
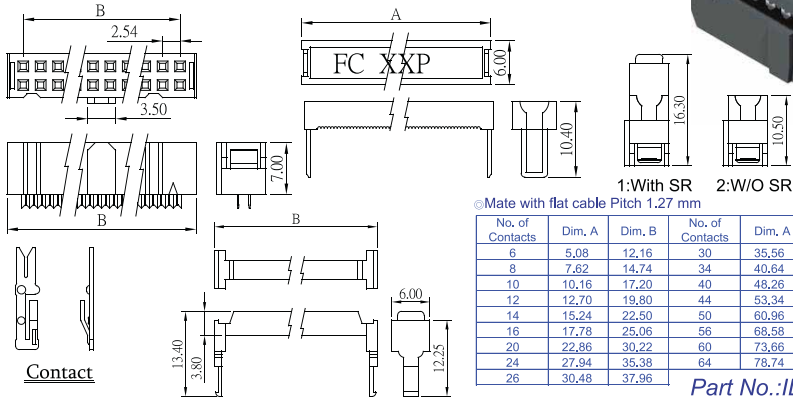


Specifications

Current Rate:2.5AMP
Insulation Resistance:1000MΩ Min
Contact Resistance:20mΩ Max
Dielectric Voltage:1000V AC for one minute
Operation Temperature:-55°C to +105°C

Material

Insulator:Polyester,UL 94V-0
©Standard:PBT
Terminal:Copper Alloy



No. of Contacts	Dim. A	Dim. B	No. of Contacts	Dim. A	Dim. B
6	5,08	12,16	30	35,56	43,12
8	7,62	14,74	34	40,64	48,28
10	10,16	17,20	40	48,26	56,02
12	12,70	19,80	44	53,34	61,18
14	15,24	22,50	50	60,96	68,92
16	17,78	25,06	56	68,58	76,66
20	22,86	30,22	60	73,66	81,82
24	27,94	35,38	64	78,74	86,98
26	30,48	37,96			

Part No.:IDC1-XX-L