

Specifications

Current Rate:1 AMP

Insulation Resistance:1000M Ω Min

Contact Resistance:30m Ω Max

Dielectric Voltage:500V AC for one minute



Operation Temperature:-40°C to +105°C

Material

Insulator:Polyester,UL 94V-0

©Standard:PBT

Terminal:Copper Alloy

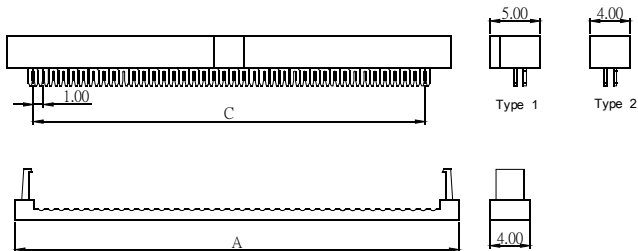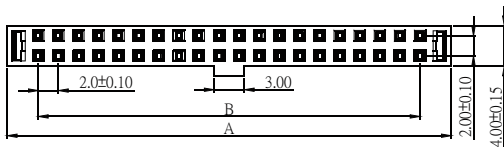

No. Contacts	Dimensions		
	A	B	C
6	10.20	4.00	5.00
8	12.20	6.00	7.00
10	14.20	8.00	9.00
12	16.20	10.00	11.00
14	18.20	12.00	13.00
16	20.20	14.00	15.00
18	22.20	16.00	17.00
20	24.20	18.00	19.00
22	26.20	20.00	21.00
24	28.20	22.00	23.00
26	30.20	24.00	25.00
30	34.20	28.00	29.00
34	38.20	32.00	33.00
36	40.20	34.00	35.00
40	44.20	38.00	39.00
44	48.20	42.00	43.00
50	54.20	48.00	49.00
60	64.20	58.00	59.00
64	68.20	62.00	63.00

Part No.:IDC2C-XX-L