

Specifications

Current Rate:1 AMP

Insulation Resistance:1000M Ω Min

Contact Resistance:20m Ω Max

Dielectric Voltage:500V AC for one minute


Operation Temperature:-40°C to +65°C

Material

Insulator:Polyester,UL 94V-0

©Standard:PBT

Terminal:Copper Alloy

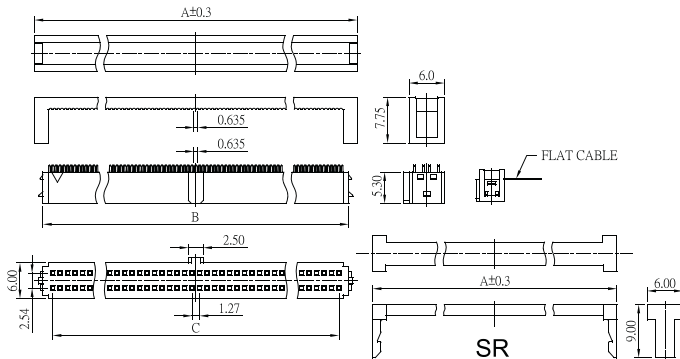

©Mate with flat cable Pitch 0.635 mm

No. of Contacts	Dim. A	Dim. B	Dim C
10	11.35	8.45	5.08
16	15.16	12.26	8.89
20	17.70	14.80	11.43
26	21.51	18.61	15.24
30	24.05	21.15	17.78
34	26.59	23.69	20.32
40	30.40	27.50	24.13
50	36.75	33.85	30.48
60	43.10	40.20	36.83
68	48.18	45.28	41.91
80	55.80	52.90	49.53
100	68.50	65.80	62.23

Part No.:IDC3-XX-L