



### Specifications

Current Rate:1 AMP  
Insulation Resistance:1000MΩ Min  
Contact Resistance:20mΩ Max  
Dielectric Voltage:500V AC for one minute  
Operation Temperature:-40°C to +65°C

### Material

Insulator:Polyester,UL 94V-0  
©Standard:PBT  
Terminal:Copper Alloy

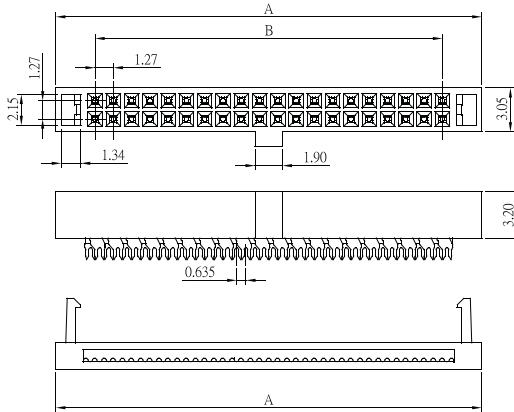

© Mate with flat cable Pitch 0.635 mm

No. of Contacts	Dim. A	Dim. B
10	10.54	5.08
12	11.81	6.35
20	16.89	11.43
26	20.70	15.24
30	23.24	17.78
34	25.78	20.32
40	29.59	24.13
44	32.13	26.67
50	35.94	30.48
60	42.29	36.83
68	47.37	41.91
80	54.99	49.53

Part No.:IDC4-XX-L