

Specifications

Current Rating: 1A AC,DC

Voltage Rating: 1400V AC,DC

Temperature Range: -25°C to +85°C

Contact Resistance: 10mΩ Max







Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 3800V AC/minute

Terminal: Brass / Tin Plated

Solder Pin: Brass / Tin Plated

Material: Nylon 6T,UL94V-0

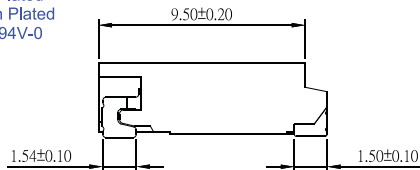

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Part No.:LCDMR-2P2TW-U