

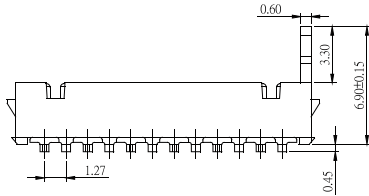

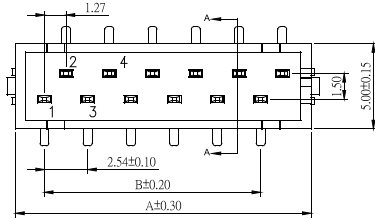


Specifications

Current Rate:1.0 AMP
Insulation Resistance:100MΩ Min
Contact Resistance:20mΩ Max
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C

Material

Insulator:Polyester,UL 94V-0
©Standard:Nylon 46
Terminal:Copper Alloy



No. of Contacts	Dimension	
	A	B
04	7.20	3.81
06	9.74	6.35
08	12.28	8.89
10	14.82	11.43
12	17.63	13.97
14	19.90	16.51
16	22.44	19.05
18	24.98	21.59
20	27.52	24.13

Part No.:MIMM-MXX-U