

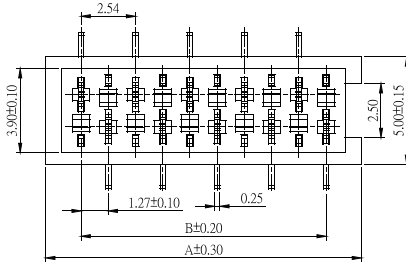


### Specifications


Current Rate:1.0 AMP  
Insulation Resistance:100MΩ Min  
Contact Resistance:20mΩ Max  
Dielectric Voltage:500V AC for one minute  
Operation Temperature:-40°C to +105°C

### Material

Insulator:Polyester,UL 94V-0  
©Standard:Nylon 46  
Terminal:Copper Alloy



Recommended PCB Layout  
(PCB TOLERANCE ±0.05)

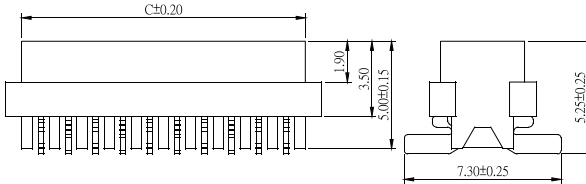

No. of Contacts	Dim. A	Dim. B	Dim. C
4	7.00	3.81	5.60
6	9.54	6.35	8.14
8	12.08	8.89	10.68
10	14.62	11.43	13.22
12	17.16	13.97	15.76
14	19.70	16.51	18.30
16	22.24	19.05	20.84
18	24.78	21.59	23.38
20	27.32	24.13	25.92

Part No.:MIMM-XX-U