

Specifications

Current Rate:1.0 AMP

Insulation Resistance:100MΩ Min

Contact Resistance:20mΩ Max

Dielectric Voltage:500V AC for one minute




Operation Temperature:-40°C to +105°C

Material



Insulator:Polyester,UL 94V-0

©Standard:P.B.T

Terminal:Copper Alloy

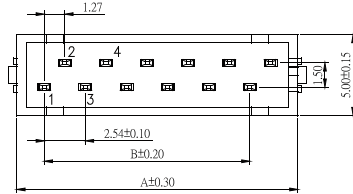

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

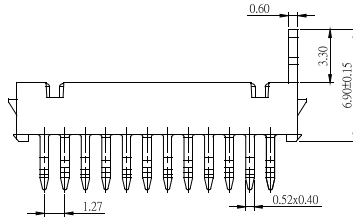

No. of Contacts	Dim. A	Dim. B
4	7.20	2.54
6	9.74	5.08
8	12.28	7.62
10	14.82	10.16
12	17.36	12.70
14	19.90	15.24
16	22.44	17.78
18	24.98	20.32
20	27.52	22.86

Part No.:MIMS-MXX-L