


FPC/FFC 1.25mm Non ZIF SMT Type Top Entry

Specifications

Current Rate: 0.5 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 30mΩ Max.
 Dielectric Voltage: 250V AC for one minute
 Operation Temperature: -55°C to +85°C

Material

Insulator: Polyester, UL 94V-0
 ©Standard: Nylon 6T
 Terminal: Copper Alloy
 Plated: Tin Plated

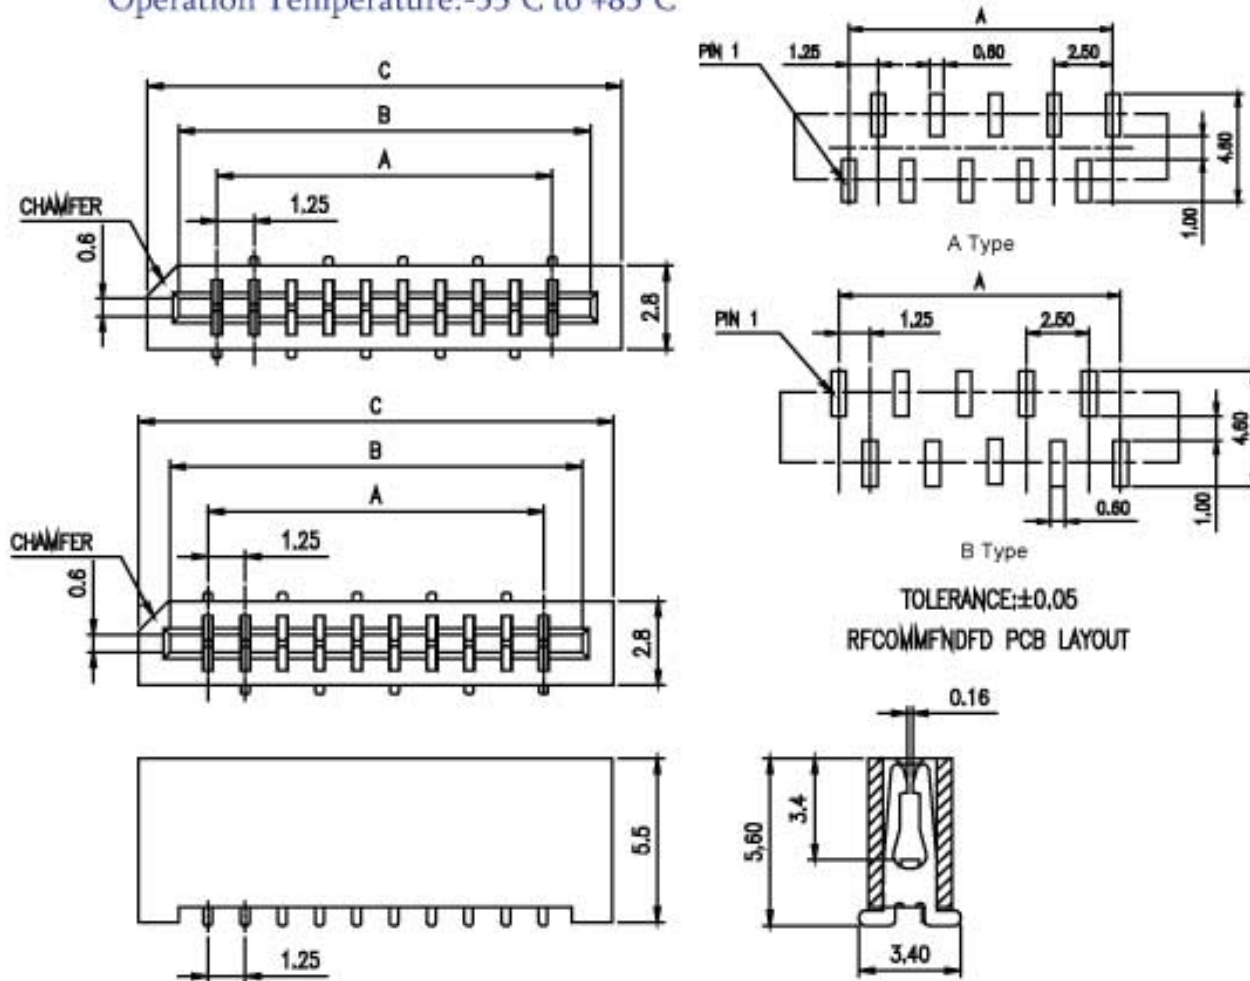

No. of Contacts	Dimensions				No. of Contacts	Dimensions				
	A	B	C	L		A	B	C	L	
03	2.50	5.05	7.15	4.00	17	20.00	22.55	24.65	12.00	
04	3.75	6.30	8.40		18	21.25	23.80	25.90		
05	5.00	7.55	9.65		19	22.50	25.05	27.15		
06	6.25	8.80	10.90		20	23.75	26.30	28.40		
07	7.50	10.05	12.15		21	25.00	27.55	29.65		
08	8.75	11.30	13.40		22	26.25	28.80	30.90		
09	10.00	12.55	14.65		23	27.50	30.05	32.15		
10	11.25	13.80	15.90		24	28.75	31.30	33.40		
11	12.50	15.05	17.15	8.00	25	30.00	32.55	34.65		
12	13.75	16.30	18.40		26	31.25	33.80	35.90		
13	15.00	17.55	19.65		27	32.50	35.05	37.15		
14	16.25	18.80	20.90		28	33.75	36.30	38.40		
15	17.50	20.05	22.15		29	35.00	37.55	39.65		
16	18.75	21.30	23.40		12.00	30	36.25	38.80		40.90