


# FPC/FFC 1.0mm ZIF SMT Type Top Entry

## Specifications


Current Rate:0.5 AMP  
 Insulation Resistance:500MΩ Min.  
 Contact Resistance:30mΩ Max.  
 Dielectric Voltage:500V AC for one minute  
 Operation Temperature:-55°C to +85°C

## Material


Insulator:Polyester,UL 94V-0  
 ©Standard:Nylon 46  
 Terminal:Copper Alloy  
 Plated:Tin Plated

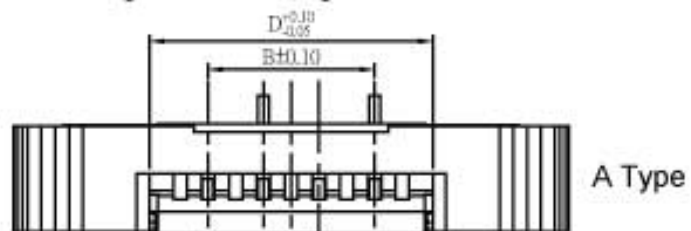


A Type

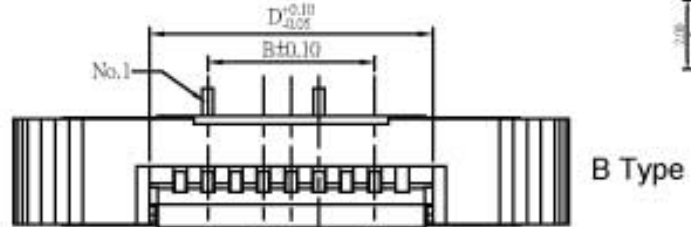

B Type



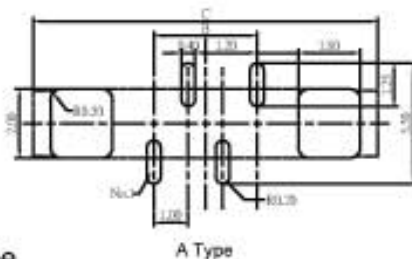


A Type

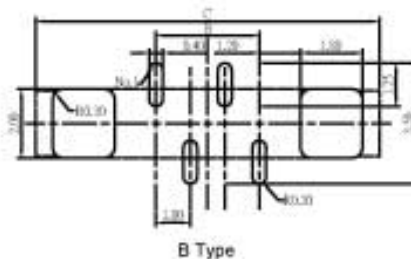

B Type

Recommended PCB Layout  
 (PCB TOLERANCE ±0.05)

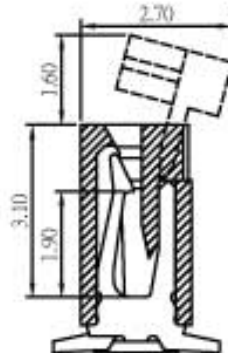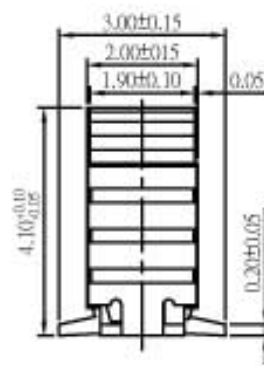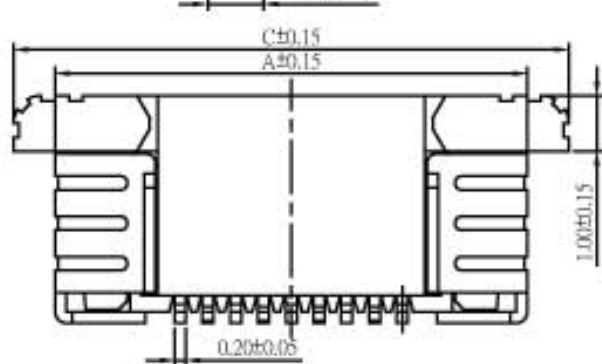

No. of Contacts	Dimensions			
	A	B	C	D
04	8.50	3.00	10.00	5.10
05	9.50	4.00	11.00	6.10
06	10.50	5.00	12.00	7.10
07	11.50	6.00	13.00	8.10
08	12.50	7.00	14.00	9.10
09	13.50	8.00	15.00	10.10
10	14.50	9.00	16.00	11.10
11	15.50	10.00	17.00	12.10
12	16.50	11.00	18.00	13.10
13	17.50	12.00	19.00	14.10
14	18.50	13.00	20.00	15.10
15	19.50	14.00	21.00	16.10
16	20.50	15.00	22.00	17.10
17	21.50	16.00	23.00	18.10
18	22.50	17.00	24.00	19.10
19	23.50	18.00	25.00	20.10
20	24.50	19.00	26.00	21.10
21	25.50	20.00	27.00	22.10
22	26.50	21.00	28.00	23.10
23	27.50	22.00	29.00	24.10
24	28.50	23.00	30.00	25.10