
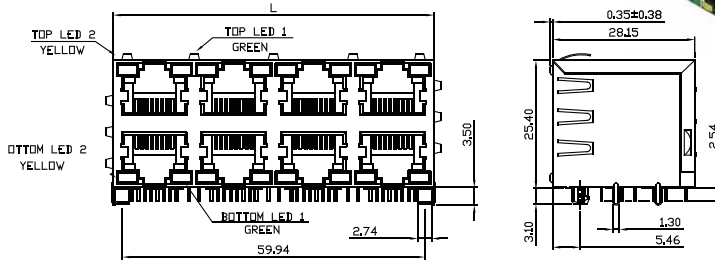



Modular Jack Shielded Side Entry With LED H=25.4 W=28.15

Material&Finish

Housing:Glass Fiber, PBT, UL 94V-0
 Contact :0.35mm Thickness Phosphor Bronze,
 Gold Plated Over Nickel on Contact Area.

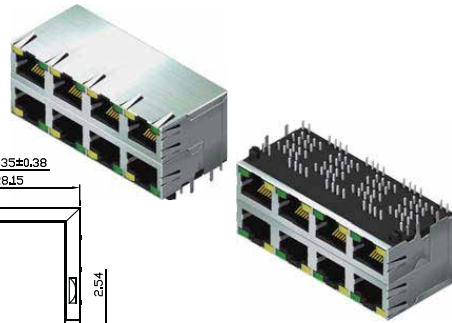

Port	201	202	204	206
Dim. L	16.45	32.10	63.75	95.10



Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

Order Information

