Modular Jack Shielded Side Entry With LED H=13.6 W=21.2

Material&Finish

Housing:Glass Fiber, P.B.T, UL 94V-0, Black
Contact :0.35mm Thickness Phosphor Bronze,
Gold Plated Over Nickel on Contact Area.

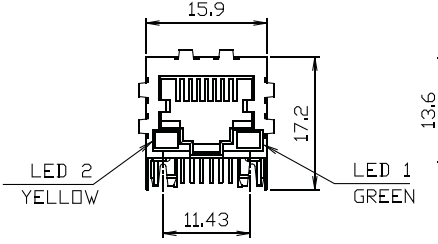

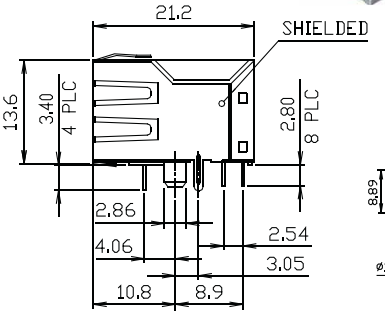



Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Order Information

M	R	J	K	S	-	8	P	8	C	-	X	X	-	L

- 8P: Number of Positions (8P)
- 8C: Number of Contacts (8C)
- X: Gold Plated
  - ◎GA:6u"
  - GB:15u"
  - GC:30u"
  - GD:50u"
- X: ◎B:Black Insulator
- L: L:RoHS + PBT