

Modular Jack Shielded Side Entry H=13.5 W=18.3





Material&Finish

Housing:P.B.T, UL 94V-0, Black

Contact :0.35mm Thickness Phosphor Bronze,

Gold Plated Over Nickel on Contact Area.

Shield:Bronze Plated Nickel.

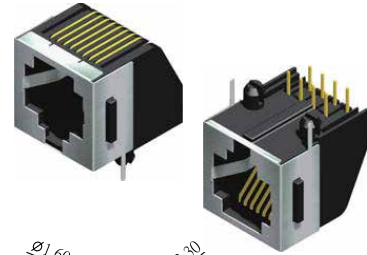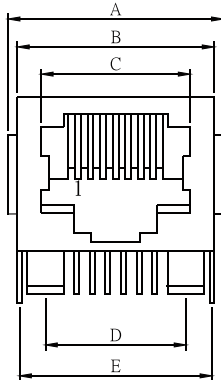

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Positions	Contacts	A	B	C	D	E
6P	2C/4C/6C	15.75	13.90	9.90	10.16	13.70
8P	8C	17.75	16.00	11.93	11.43	15.65

Order Information

