Modular Jack Shielded Side Entry H=13.1 W=17.9

Material&Finish

Housing:Glass Fiber, PBT, UL 94V-0, Black
Contact :0.35mm Thickness Phosphor Bronze,
Gold Plated Over Nickel on Contact Area,
Tin Plated Over Nickel on solder Area

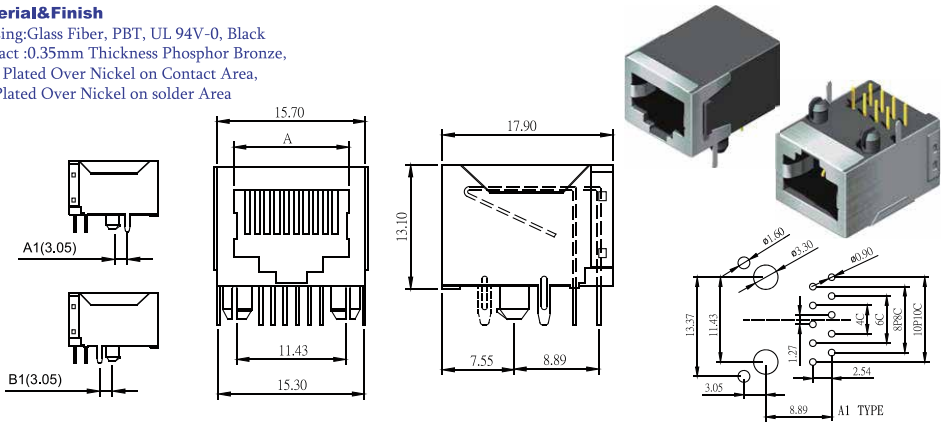

Position	Contact	A
6P	2C/4C/6C	9.90
8P	4C/6C/8C	11.95
10P	10C	11.95

Order Information

S	2	8	0	-	X	X	X	X	-	X	X	X	-	L

- Number of position (6P,8P,10P)
- Number of contact (4C,6C,8C,10C)
- Gold Plating
  - ◎GA:6u"
  - GB:15u"
  - GC:30u"
  - GD:50u"
- B:Black insulator
- A1:3.05 B1:3.05
- L:RoHS + P.B.T

GAD Elektronik-Komponenten-Vertrieb