

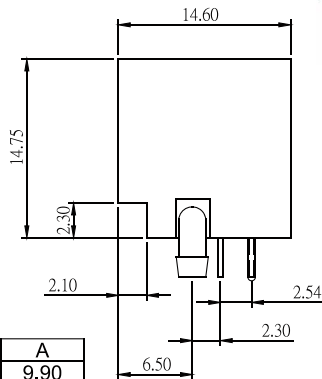



Modular Jack Shielded Side Entry H=14.75 W=14.6

Material&Finish

Housing:Glass Fiber, PBT, UL 94V-0
 Contact :0.35mm Thickness Phosphor Bronze,
 Gold Plated Over Nickel on Contact Area.

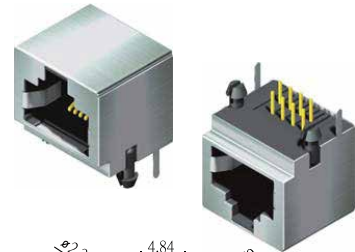

Position	Contact	A
6P	4C/6C	9.90
8P	8C	11.90
10P	10C	11.90

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

Order Information

