

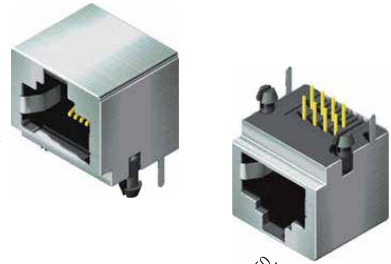
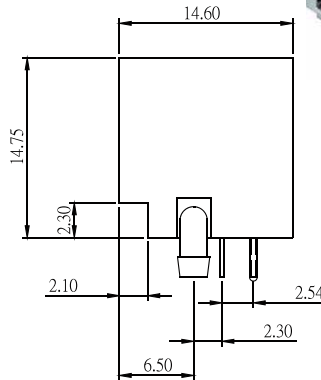


Modular Jack Shielded Side Entry H=14.50 W=14.0

Material & Finish

Housing: Glass Fiber, PBT, UL 94V-0
 Contact :0.35mm Thickness Phosphor Bronze,
 Gold Plated Over Nickel on Contact Area.



Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

Order Information

